
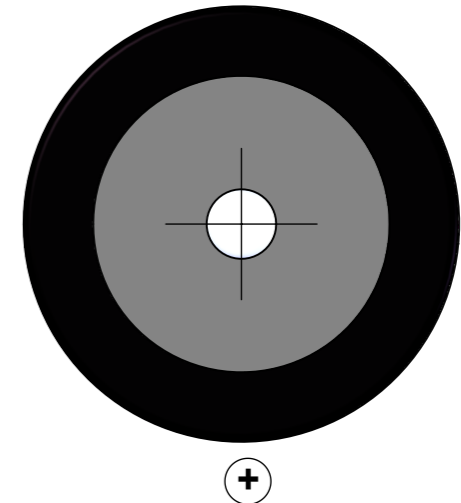
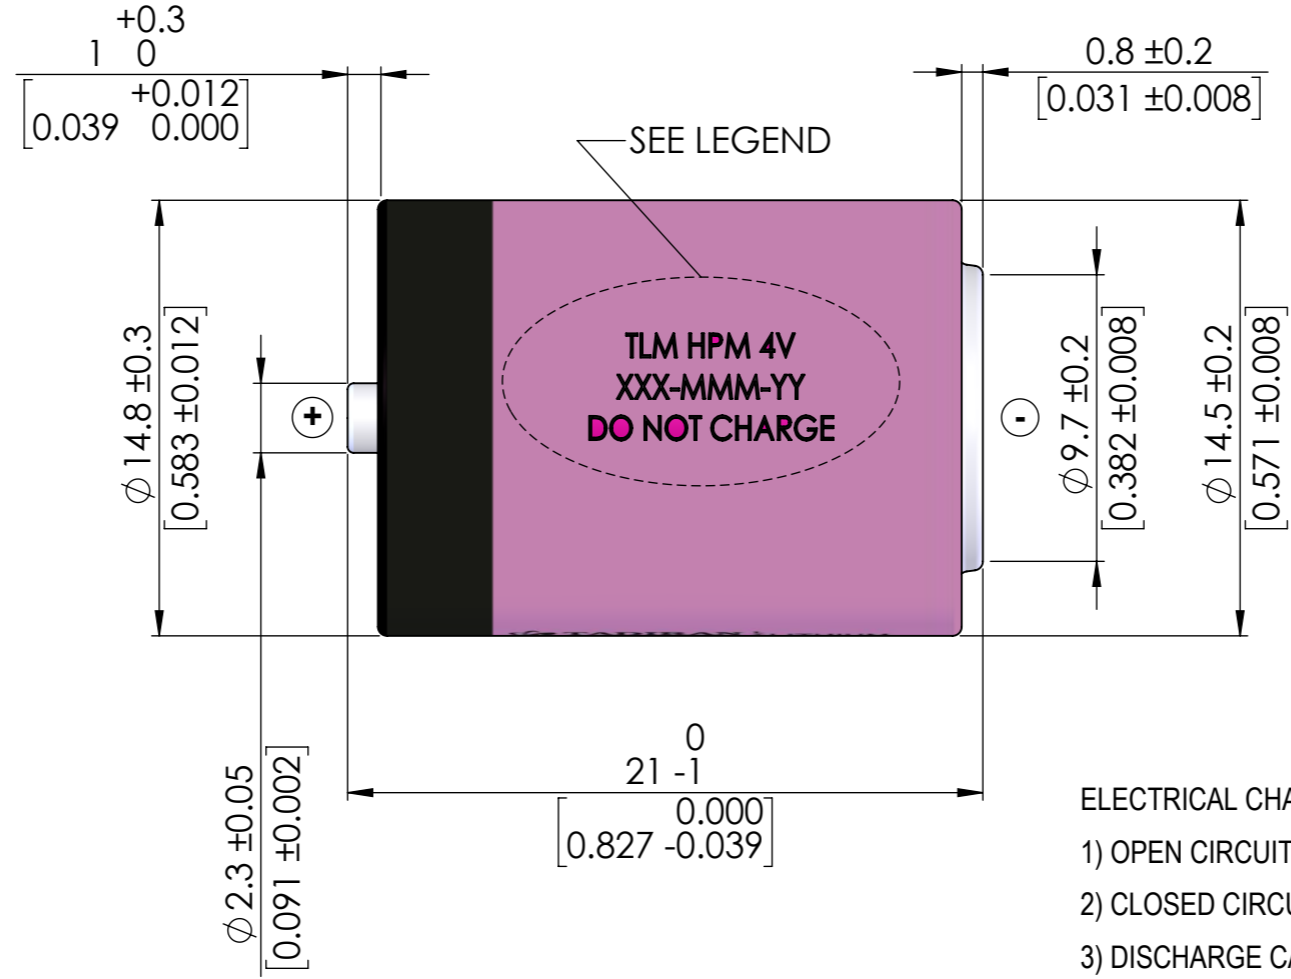


WARNING!
 ALL THE INFORMATION CONTAINED IN THIS DOCUMENT OR DISCLOSED BY IT IS THE PROPERTY OF TADIRAN BATTERIES LTD. AND MAY NOT BE USED WITHOUT ITS WRITTEN AUTHORIZATION.

LEGEND

- HPM - MODEL
- 4V - NOMINAL VOLTAGE
- XXX - BATCH CODE
- MM - YY - PRODUCTION DATE

REV.	DESCRIPTION	E.C.N.	DATE	DRAWN	CHECKED
A	NEW DRAWING	6103297	06/12/2017	PETER	KARIN

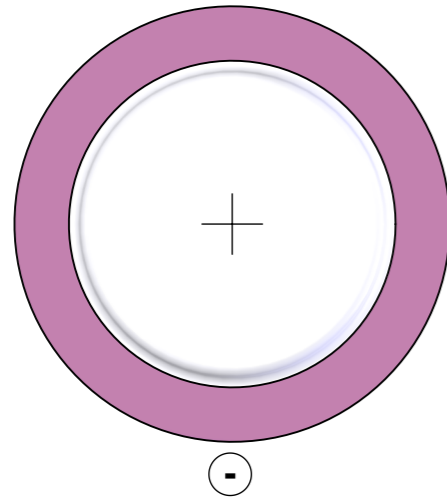

ELECTRICAL CHARACTERISTICS:

- 1) OPEN CIRCUIT VOLTAGE: 3.95V TO 4.07
- 2) CLOSED CIRCUIT VOLTAGE @0.1SEC 0.5A: 3.88V MIN.
- 3) DISCHARGE CAPACITY TO 2.8V @20mA: 500mAh
- 4) DISCHARGE CAPACITY TO 2.8V @500mA: 430mAh
- 5) MAX. DISCHARGE CURRENT FOR 1SEC PULSE TO 2.6V: 5A
- 3) OPERATING VOLTAGE: -40 °C TO +85 °C
- 4) WEIGHT MAXIMUM: 20gr



REAR VIEW

1	72155322020	TLM-1550HPM		PC	1	
	PART NUMBER	NAME	DESCRIPTION	U/M	QT	NOTES
UNLESS OTHERWISE SPECIFIED:		<p style="text-align: center;">TLM-1520HPM/S BATTERY P/N: 72152322000</p> <p>PROD/PROJ: .</p> <p style="text-align: right;">TADIRAN BATTERIES LTD</p>				
ALL DIMENSIONS ARE IN MM.						
TOLERANCES: LINEAR: ±1 ANGLES: ±1°						
ROUGHNESS: 						
SCALE: NON		OPERATION				
		DRAWN		Peter Faigenboim	10/05/2016	SHEET/OF 01 / 01
		DESIGNED		Peter Faigenboim	10/05/2016	
		CHECKED		Eitan Pinhasi	10/05/2016	
		APPROVED		Eitan Pinhasi	10/05/2016	
72152322001						