
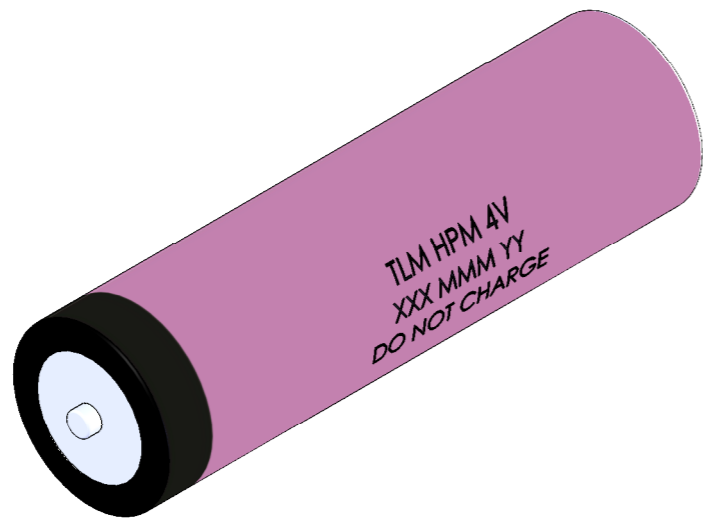


WARNING!
 ALL THE INFORMATION CONTAINED IN THIS DOCUMENT OR DISCLOSED BY IT IS THE PROPERTY OF TADIRAN BATTERIES LTD. AND MAY NOT BE USED WITHOUT ITS WRITTEN AUTHORIZATION.

LEGEND

HPM - MODEL
 4V - NOMINAL VOLTAGE
 XXX - BATCH CODE
 MM - YY - PRODUCTION DATE

REV.	DESCRIPTION	E.C.N.	DATE	DRAWN	CHECKED
A	NEW DRAWING	6102882	17/05/2016	P ETER	EITAN
B	MAX. DISCHARGE CURRENT CHANGED TO 5A	6103136	13/02/2017	PETER	EITAN
C	EXTERNAL SLEEVE CHANGED	6103297	29/03/2017	PETER	EITAN

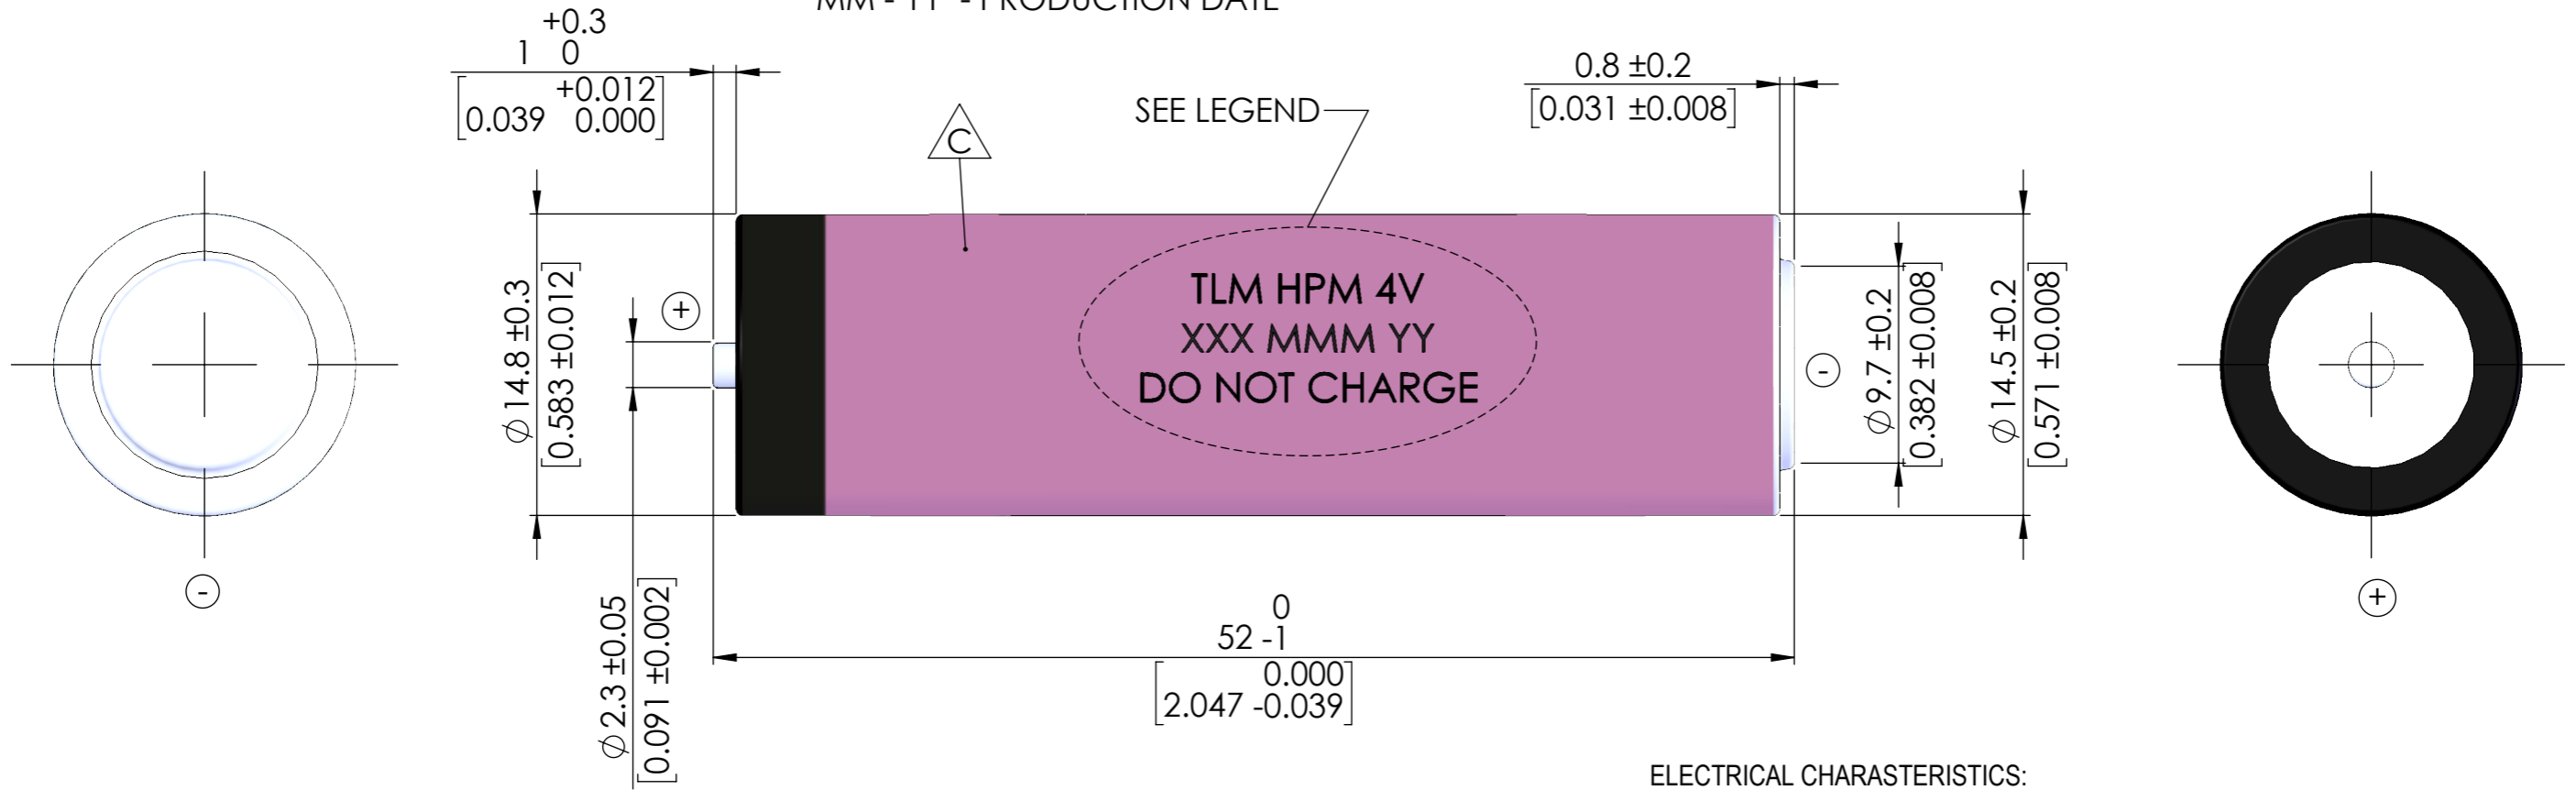

ELECTRICAL CHARACTERISTICS:

- 1) OPEN CIRCUIT VOLTAGE: 3.95V TO 4.07
- 2) CLOSED CIRCUIT VOLTAGE @0.1SEC 0.5A: 3.88V MIN.
- 3) DISCHARGE CAPACITY TO 2.8V @20mA: 500mAh
- 4) DISCHARGE CAPACITY TO 2.8V @500mA: 430mAh
- 5) MAX. DISCHARGE CURRENT FOR 1SEC PULSE TO 2.6V: 5A Δ_B
- 3) OPERATING VOLTAGE: -40°C TO +85°C
- 4) WEIGHT MAXIMUM: 20gr

1	72155322020	TLM-1550HPM		PC	1														
	PART NUMBER	NAME	DESCRIPTION	U/M	QT	NOTES													
UNLESS OTHERWISE SPECIFIED:		<p>TLM-1550HPM/S BATTERY P/N:72155322000</p> <p>OPERATION</p>																	
ALL DIMENSIONS ARE IN MM.																			
TOLERANCES: LINEAR: ± 1 ANGLES: $\pm 1^\circ$																			
ROUGHNESS: $\sqrt{\quad}$ ($\sqrt{\quad}$)																			
SCALE: NON		PROD/PROJ: .		<table border="1"> <tr> <td>DRAWN</td> <td>Peter Faigenboim</td> <td>10/05/2016</td> <td rowspan="4">SHEET/OF</td> </tr> <tr> <td>DESIGNED</td> <td>Peter Faigenboim</td> <td>10/05/2016</td> </tr> <tr> <td>CHECKED</td> <td>Eitan Pinhasi</td> <td>10/05/2016</td> </tr> <tr> <td>APPROVED</td> <td>Eitan Pinhasi</td> <td>10/05/2016</td> </tr> </table>			DRAWN	Peter Faigenboim	10/05/2016	SHEET/OF	DESIGNED	Peter Faigenboim	10/05/2016	CHECKED	Eitan Pinhasi	10/05/2016	APPROVED	Eitan Pinhasi	10/05/2016
DRAWN	Peter Faigenboim	10/05/2016	SHEET/OF																
DESIGNED	Peter Faigenboim	10/05/2016																	
CHECKED	Eitan Pinhasi	10/05/2016																	
APPROVED	Eitan Pinhasi	10/05/2016																	
				<p>72155322001</p>															