

Ultra High Power TLI-1550US



AA Size Lithium Ion Rechargeable Battery

Notice: Charging circuit and application load profile have to be approved by Tadiran prior to the use of this cell.



Physical Characteristics

Length	53 mm. Max
Diameter	14.8 ± 0.3 mm
Weight	21 gr. Max

Electrical Characteristics (for batteries stored at RT for 1 year or less)

Charge

Max. Charge Voltage	4.1 V
Charge Method	CCCV (Constant Current/Constant Voltage)
Max Charge Current @ -20 to +50 °C	100 mA
Max Charge Current @ -40 to +85 °C	20 mA
Charge / Discharge operating temp.	-40 to +85 °C

Discharge

Max. Continuous Discharge Current	6.0 A @ 20 °C (without PTC)
End of Discharge	2.2 V @ RT. (discharge below 2.2 V at 20 °C may increase the cell internal impedance)

Performance

Item	Value	Conditions
Maximum Capacity when charged to 4.1 V	700 mAh	Discharge at 50 mA to 2.2 V at 20 °C
	650 mAh	Discharge at 1 A to 2.5 V at 20 °C
	450 mAh	Discharge at 1 A to 2.5 V at -40 °C
Charge / Discharge Cycles	25	At Room Temperature (see attached chart)
Capacity Retention after 25 cycles (reversible)	80 %	Discharge at 250 mA at 20 °C
Capacity Retention after 5 years (reversible)	91 %	Discharge at 250 mA at 20 °C
Impedance (RT)	< 70 mΩ	Impedance at 1 KHz

Physical Cell / Battery Protection (to be applied by the user)

Item	Specification
Over charge protection	Cell voltage should not be higher than 4.2 V
Over discharge protection	Cell voltage should not be lower than 2.2 V

Battery pack assembly and usage considerations

- For 2 cells or more in series, voltage shall be monitored on each cell.
- For more than 2 cells in parallel, maximum charge current shall be limited to 250 mA for the whole pack.

Safety Considerations

The cells successfully passed the following tests:

Shock & Vibration	UL, IEC
Short Circuit at RT, +55 °C & +72 °C	UN, UL, IEC
Heating at 130 °C	UL, IEC
Over Charge	UN, UL, IEC
Forced Discharge	UN, UL, IEC
Crush & Impact	UN, UL, IEC

UN Manual of Tests & Criteria
UL 1642, File MH12193
IEC 62133



WARNING:

Fire, Explosion, And Severe Burn Hazard.
Do Not Crush, Disassemble, Heat Above 100 °C, Incinerate Or Short Circuit.

Key Features

- Hermetically sealed (glass-to-metal)
- Wide operating temperature range
- Low self discharge
- High output current
- High reliability
- Safe design
- Lightweight

Main Applications

- Energy Harvesting
- Wireless Sensors
- BUB in Metering
- Asset, Container & Cargo Tracking
- Parking Meters
- Electrical Grid Monitoring
- Emergency & Medical Devices
- Automotive
- Industrial and Agricultural IOT

Ordering P/N:

TLI-1550US/Z2/T *	61-15xx-xxxxx
TLI-1550US/Z2/TP *	61-15xx-xxxxx

* Z2 - Indicates that the cell is equipped with PTC- SRP 200.

For cells without the PTC, please contact Tadiran Batteries

www.tadiranbatteries.com


THE INFORMATION PROVIDED HERE IS NECESSARILY OF A GENERAL NATURE. SINCE SPECIFIC PERFORMANCE DEPENDS ON ACTUAL OPERATING AND STORAGE CONDITIONS, OUR ENGINEERS WILL PROVIDE PARTICULAR APPLICATION INSTRUCTIONS UPON REQUEST. DATA SUBJECT TO REVISION WITHOUT NOTICE. ANY REPRESENTATION IN THIS BROCHURE CONCERNING PERFORMANCE ARE FOR INFORMATION PURPOSES ONLY AND NOT WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF FUTURE PERFORMANCE. TADIRAN'S STANDARD LIMITED WARRANTY, STATED IN ITS SALES CONTRACT OR ORDER CONFIRMATION FORM IS THE ONLY WARRANTY OFFERED BY TADIRAN.

Ultra High Power TLI-1550US




Performance Data


Discharge curves at room temperature

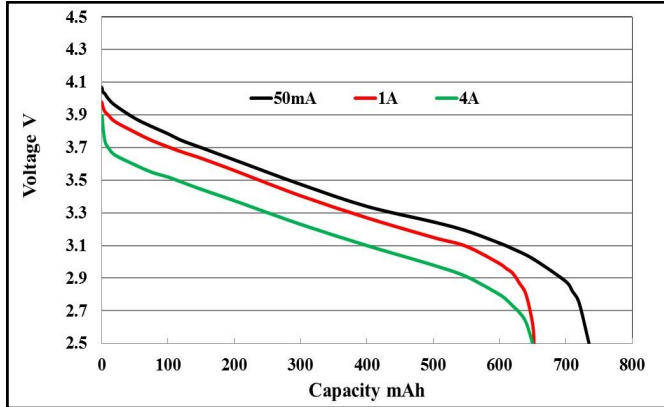


Discharge curves @ 1 A

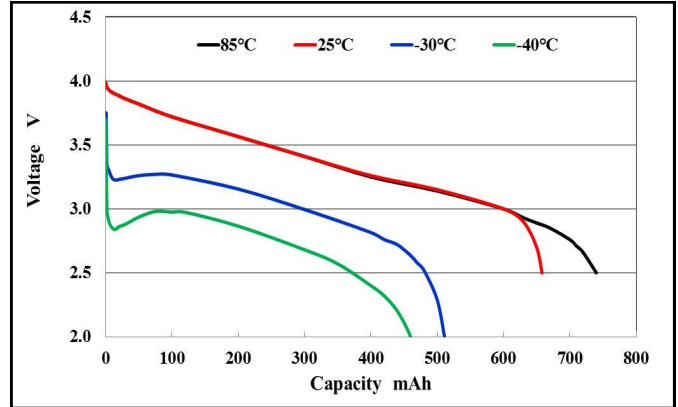


Pulse Capability at RT

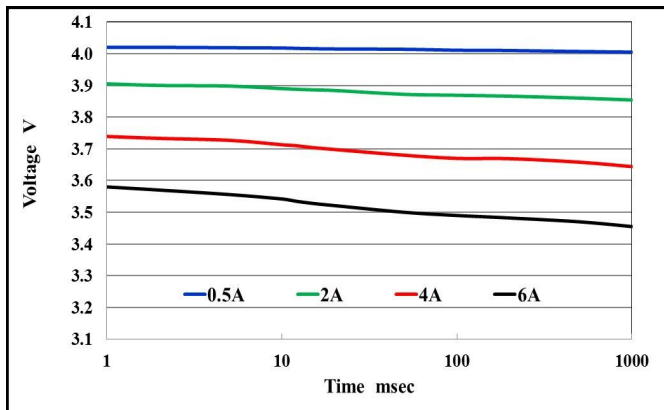


1 Sec. Pulse Capability at 1 A

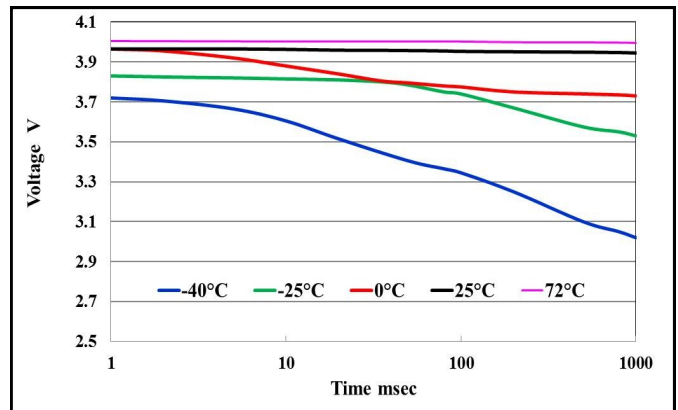

Charge/Discharge Cycling Performance RT
(250 mA to 4.1 V(EOC 20 mA; Discharge 250 mA to 2.5 V)

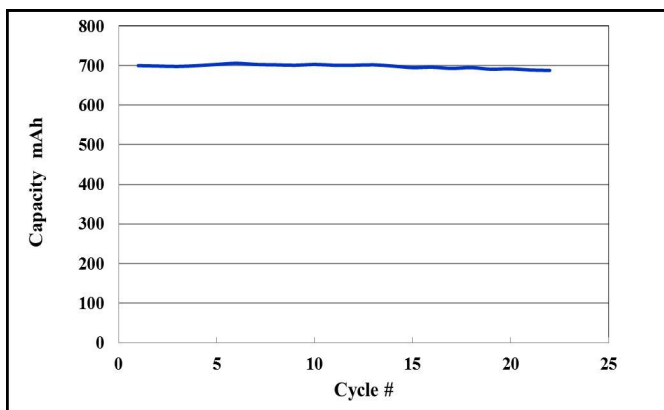

Open Circuit Voltage Vs. Capacity
(100 % capacity = 700 mAh at 50 mA discharge to 2.5 V)

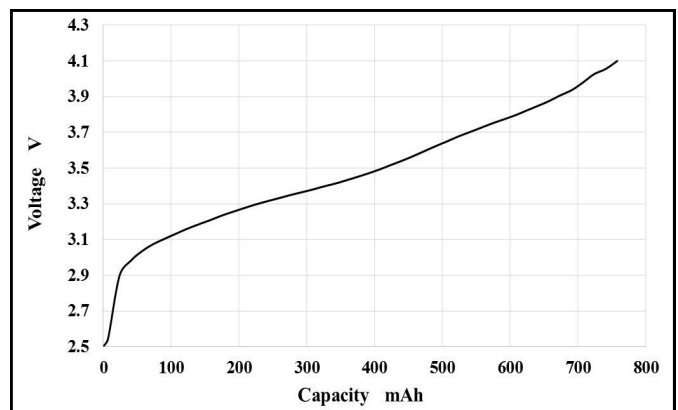

THE INFORMATION PROVIDED HERE IS NECESSARILY OF A GENERAL NATURE. SINCE SPECIFIC PERFORMANCE DEPENDS ON ACTUAL OPERATING AND STORAGE CONDITIONS, OUR ENGINEERS WILL PROVIDE PARTICULAR APPLICATION INSTRUCTIONS UPON REQUEST. DATA SUBJECT TO REVISION WITHOUT NOTICE. ANY REPRESENTATION IN THIS BROCHURE CONCERNING PERFORMANCE ARE FOR INFORMATION PURPOSES ONLY AND NOT WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF FUTURE PERFORMANCE. TADIRAN'S STANDARD LIMITED WARRANTY, STATED IN ITS SALES CONTRACT OR ORDER CONFIRMATION FORM IS THE ONLY WARRANTY OFFERED BY TADIRAN.